

LENX

LX-A-D2IRVF

HD 1080p IR Turret Camera



- 2 megapixel highperformance CMOS
- Analog HD output, up to 1080p resolution
- Day/Night switch
- Smart IR
- Up to 40m IR distance
- Switchable TVI/AHD/CVI/CVBS
- IP66

Order Model:
LX-A-D2IRVF



LENX

SPECIFICATIONS


Model	LX-A-D2IRVF
Camera	
Image Sensor	2MP CMOS image sensor
Signal System	PAL/NTSC
Effective Pixels	1920(H)×1080(V)
Min. illumination	0.01 Lux@(F1.2,AGC ON),0 Lux with IR
Shutter Time	1/25(1/30)s to 1/50,000s
Lens	2.8 - 12 mm @ F1.4
	Angle of view: 102.25° - 32 °
Montagem de lente	Φ14
Dia e Noite	ICR
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360°
Synchronization	Internal synchronization
Video Frame Rate	1080p@25fps/1080p@30fps
HD Video Output	1 analog HD output
S/N Ratio	>62dB
General	
Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F), Humidity 90% or less (non-condensation)
Power Supply	12 VDC ±15%
Power Consumption	Max. 4 W
Protection Level	IP66
IR Range	Up to 40m
Dimensions	Φ130.54 × 102.4mm(Φ 5.1" × 4")
Weight	Approx. 710 g

LENX

www.lenxvideo.com

LENX

DIMENSIONS

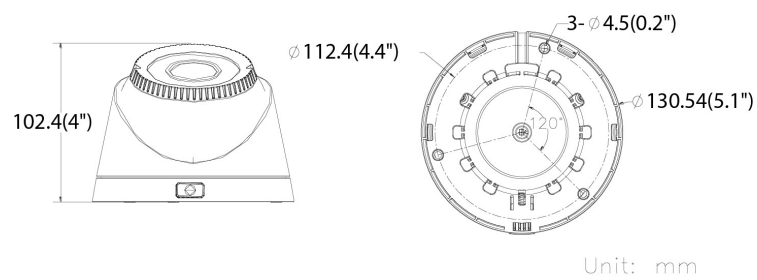

ACCESSORIES



LX-1273ZJ-140
Wall Mounting



LX-1275ZJ-SUS
Vertical Pole Mounting



LX-1271ZJ-140
Corner Mounting




LX-1273ZJ-140B
Junction Box



LX-1241ZJ
Inclined Ceiling Mounting



LX-1H18
Video Balun



LX-X41T
Camera Tester