


LENX

LX-A-B2IR28
LX-A-B2IR36

HD 1080p Bullet Camera

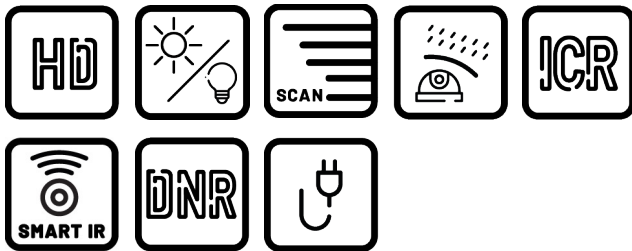

- 2 megapixel high performance CMOS
- Analog HD output, up to 1080p resolution
- Day/Night switch
- Smart IR, up to 20 m IR distance
- Switchable TVI AHD CVI CVBS
- IP66



LENX

SPECIFICATION



Camera		
Model	LX-A-B2IR28	LX-A-B2IR36
Image Sensor	2MP CMOS image sensor	
Signal System	PAL/NTSC	
Resolution	1920 (H) × 1080 (V)	
Min. illumination	0.01 Lux@(F1.2, AGC ON), 0 Lux with IR	
Frame rate	PAL: 1080p@25fps NTSC: 1080p@30fps	
Shutter Time	1/25 (1/30) s to 1/50,000 s	
Lens	2.8 mm fixed lens	3.6 mm fixed lens
Horizontal Field of View	103°	82.2°
Lens Mount	M12	
Day & Night	IR cut filter	
Angle Adjustment	Pan: 0°to 360°, Tilt: 0° to 180°, Rotation: 0° to 360°	
Synchronization	Internal synchronization	
Menu		
AGC	Low/middle/high	
Day/Night Mode	Smart/color/BW(Black and White)	
Backlight Compensation	Yes	
DWDR	Yes	
Language	English, Chinese	
Functions	Brightness, Sharpness, DNR, Mirror	
Interface		
Video Output	1 HD analog output	
Switch Button	TVI/AHD/CVI/CVBS	
General		
Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F), Humidity 90% or less (non-condensation)	
Power Supply	12 VDC±15%	
Power Consumption	Max. 4 W	
Ingress Protection	IP66	
Material	Metal	
IR Range	Up to 20 m	
Dimensions	Φ 70 mm × 154.5 mm (Φ 2.76" × 6.08")	
Peso	Approx. 400 g (0.88 lb.)	

LENX

www.lenxvideo.com

LENX

DIMENSIONS

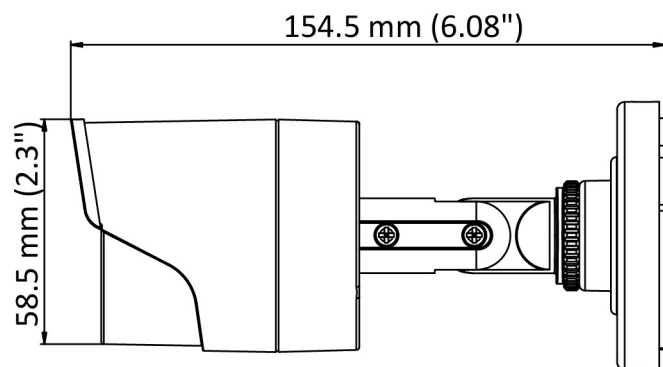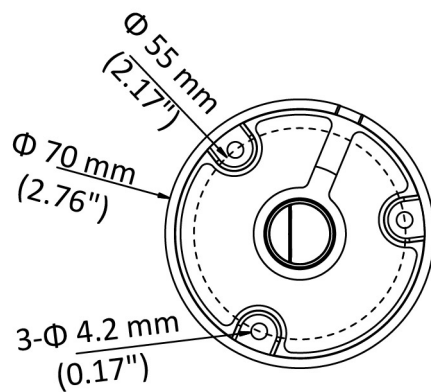

ACCESSORIES



LX-1280ZJ-XS
Junction Box



LX-1H18
Video Balun

MODEL

LX-A-B2IR28 (2.8 mm fixed lens)

LX-A-B2IR36 (3.6 mm fixed lens)

LENX

www.lenxvideo.com